NexStar® HARD DRIVE DOCK

User Manual

Model : **NST-D100S2**

All Registered Trademarks Belong To Their Respected Companies.

Copyright © 2009 Vantec Thermal Technologies. All Right Reserved.

■ Content

Content 1
1.Introduction 2
2.System Requirements 2
3.Specifications/Features 3
4.Installation 4
5.Removal 7
6.Driver Installation 9
Windows ME/2000/XP/VISTA 9
Mac OS 9.0 or later 9
Mac OS 8.6 9
7. Warranty 10

1.Introduction

The Vantec NexStar® Hard Drive Dock is a complete and easy way to add or swap hard drives to your computer. It gives you the flexibility of connecting any SATA I/II hard drive to your computer via USB 2.0 connection without opening up your computer case or installing into an enclosure. Simply just insert any 2.5" or 3.5" SATA I/II hard drive into the NexStar® Hard Drive Dock and you are ready to transfer, copy, or backup files. Quick and easy, the Vantec NexStar® Hard Drive Dock is the perfect solution to access your hard drive in seconds.

2.System Requirements

- Intel Pentium II 350 MHz-compatible or Mac G3 processor & greater.
- Microsoft Windows ME/2000/XP/VISTA or MAC OS 8.6 & greater or Linux Kernel 2.4.18 above.
- For USB 2.0 speeds, the system must support USB 2.0 specifications.

3.Specifications/Features

Features：

- Install And Access Hard Drive in Seconds.
- Simple to Use Design; No Need to Add Enclosure or Open Case.
- Eject Button for Easy Removal of Hard Drive.
- Supports 2.5"/3.5" SATA I/II Hard Drive Up to 1.5 TB.
- Add Storage to Any System with USB.
- Plug & Play.
- Attractive Blue LED Power & HDD Activity Light.
- Transfer Rates Up to 480Mbps w/USB 2.0.

Package Includes：

- NexStar® Hard Drive Dock
- USB Cable
- Power Adapter
- Power Cable
- User Manual

Specifications：

- Device Support : SATA I/II Hard Drive
- Device Size : 2.5" or 3.5"
- Internal Interface : SATA
- External Interface : USB 2.0
- Material : Plastic
- Dimension : 136 x 83 x 87mm
- HDD Capacity : Up to 1.5TB
- Power Supply : Dual 5V/12V 2A

4.Installation

1. Connect the power adapter to the NexStar® Hard Drive Dock.
2. Connect the USB Cable to the NexStar® Hard Drive Dock and attach the other end to your computer.

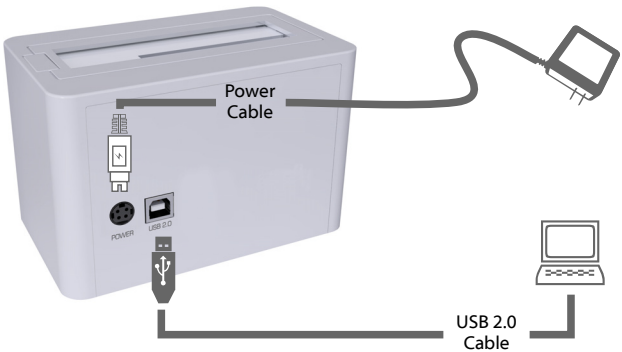

3. Insert 2.5" or 3.5" SATA hard drive (HDD) into the slot.

3-1. When the eject button is upright, the NexStar®Hard Drive Dock is ready for use.

5.Removal

Warning, please push power button & turn off unit before removing the hard drive!

1. Remove the HDD safely from your computer system.
2. Push down the button to eject the HDD.
   (Stablize the HDD with your hand).

3. Remove the HDD from the Hard Drive Dock.

6.Driver Installation

Windows ME/2000/XP/VISTA

No drivers are necessary when using Windows ME/2000/XP/VISTA. If the hard drive does not appear under My Computer, be sure to partition your hard drive.

Mac OS 9.0 or later

No drivers are necessary when using Mac OS 9.0 above. If the hard drive does not appear on the desktop, be sure to partition your hard drive.

Mac OS 8.6

1.Unplug the NexStar® Hard Drive Dock if you currently have it connected.
2.USB Mass Storage Support 1.3.5 must be installed on your system. If it is not, you can download the USB Mass Storage Support 1.3.5 from the Apple Software Updates website: http://www.apple.com/support.
3.Follow the direction associated with the USB Mass Storage Support driver to install.
4.Repeat the steps listed under "Connecting the NexStar® Hard Drive Dock to your computer".

7. Warranty

The NexStar® Hard Drive Dock comes with a 1 year limited warranty (90 day parts). If your unit become defective within that time frame, please go to **http://www.vantecusa.com** for information on how to receive warranty exchange or repair. Cosmetic defects and missing parts are not covered under this warranty. Please check the contents of the unit to make sure you received all parts. Also, check for any cosmetic flaws. If any parts are missing or if there are cosmetic defects, please contact the retailer from which you purchased the unit immediately and ask for a replacement.

Vantec Thermal Technologies
43951 Boscell Rd. Fremont, CA 94538
tel: 510-668-0368 fax: 510-668-0367
website: www.vantecusa.com